

2000 series

Flygt 2000 pumps easily handle chemically aggressive and mechanically abrasive fluids laden with particles. They handle higher flow rates up to 300 l/s and heads up to 200 meters.


Flygt 2000 products are available in lightweight aluminum or corrosion-resistant cast iron. Some models are available in explosion-proof Ex versions.



Flygt submersible drainage pumps

2000 series

2071.010

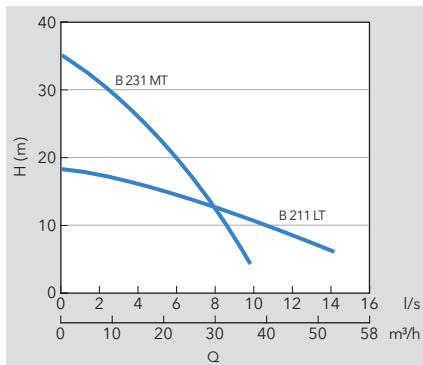


Model	B 211 LT	B 231 MT
Rating [kW]	3	3
Voltage [V/phase]	400, 3~	400, 3~
Rated current [A]	6.2	6.2
Weight [kg]	28	31
Max. height [mm]	705	665
Max. width [mm]	185	185
Discharge Ø [in]	3"	3"
Strainer hole [mm]	8×50	8×50
Warm liquid, 70°C	Yes	Yes

For additional specifications, see product technical documentation. With reservation for changes.

2000 series

2075.324 (Cast iron)

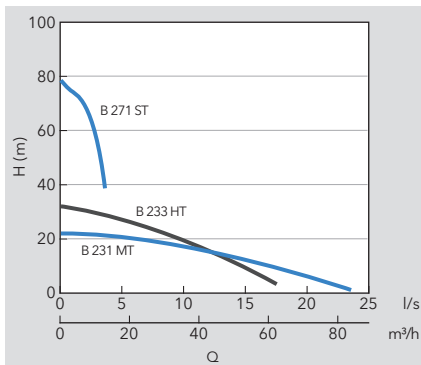


Model	B 231 MT	B 233 HT	B 271 ST
Rating [kW]	3.7	3.7	5.5
Voltage [V/phase]	400, 3~	400, 3~	400, 3~
Rated current [A]	7.1	7.1	11
Weight [kg]	73	73	90
Max. height [mm]	565	565	575
Max. width [mm]	445	445	410
Discharge Ø [in]	4"	3"	4"
Strainer hole [mm]	8×8	8×8	6×6
Warm liquid, 70°C	Yes	Yes	Yes

Available in Ex versions 2075.590/690

For additional specifications, see product technical documentation. With reservation for changes.

2000 series

2125.320 (Cast iron)

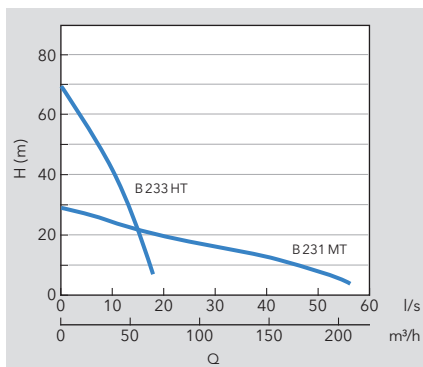


Model	B 231 MT	B 233 HT
Rating [kW]	8	8
Voltage [V/phase]	400, 3~	400, 3~
Rated current [A]	15	15
Weight [kg]	150	164
Max. height [mm]	830	865
Max. width [mm]	485	465
Discharge Ø [in]	4"	3"
Strainer hole [mm]	6×50	6×50
Warm liquid, 70°C	No	No

Available in Ex versions 2125.690

For additional specifications, see product technical documentation. With reservation for changes.

2000 series

2125.181

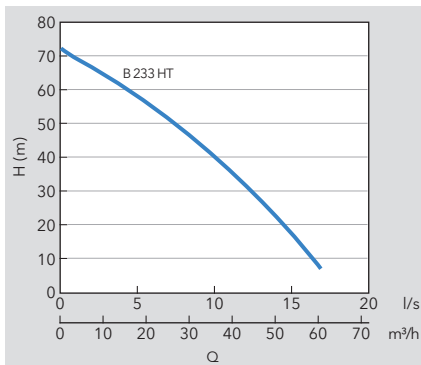


Model	B 233 HT
Rating [kW]	8
Voltage [V/phase]	400
Rated current [A]	15
Weight [kg]	80
Max. height [mm]	830
Max. width [mm]	465
Discharge Ø [in]	3"
Strainer hole [mm]	6×50
Warm liquid, 70°C	No

For additional specifications, see product technical documentation. With reservation for changes.

Flygt submersible drainage pumps

2000 series

2190.010

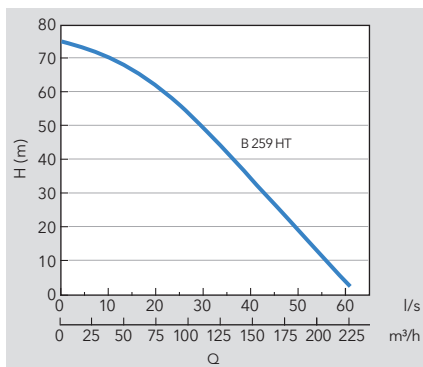


Model	B 259 HT
Rating [kW]	25
Voltage [V/phase]	400, 3~
Rated current [A]	43
Weight [kg]	210
Max. height [mm]	1050
Max. width [mm]	430
Discharge Ø [in]	4"
Strainer hole [mm]	Ø 12
Warm liquid, 70°C	No

For additional specifications, see product technical documentation. With reservation for changes.

2000 series

2201.012/020

LT
MT

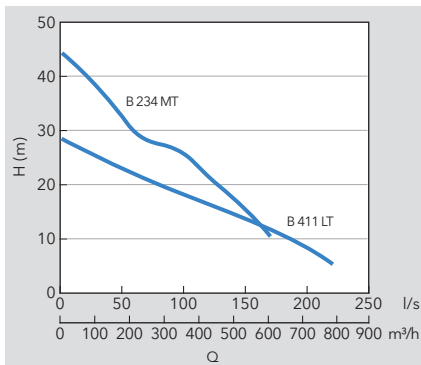

Model	B 411 LT	B 234 MT
Rating [kW]	30	37
Voltage [V/phase]	400, 3~	400, 3~
Rated current [A]	61	65
Weight [kg]	285	280
Max. height [mm]	1332	1332
Max. width [mm]	500	500
Discharge Ø [in]	6" & 8"	6" & 8"
Strainer hole [mm]	Ø 15	Ø 15
Warm liquid, 70°C	No	No

For additional specifications, see product technical documentation. With reservation for changes.

Flygt submersible drainage pumps


2000 series

2201.012

HT



SH

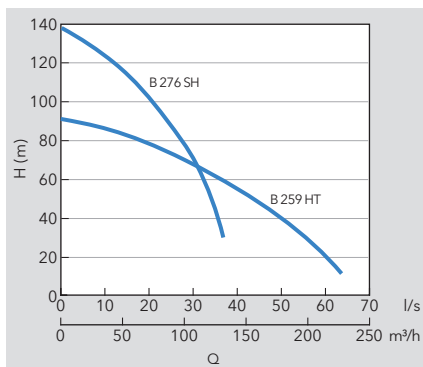


Model	B 259 HT	B 276 SH
Rating [kW]	37	37
Voltage [V/phase]	400, 3~	400, 3~
Rated current [A]	65	65
Weight [kg]	240	270
Max. height [mm]	1050	1148
Max. width [mm]	430	430
Discharge Ø [in]	4"	4"
Strainer hole [mm]	Ø 12	Ø 12
Warm liquid, 70°C	No	No

For additional specifications, see product technical documentation. With reservation for changes.

2000 series

2201.320 (Cast iron)

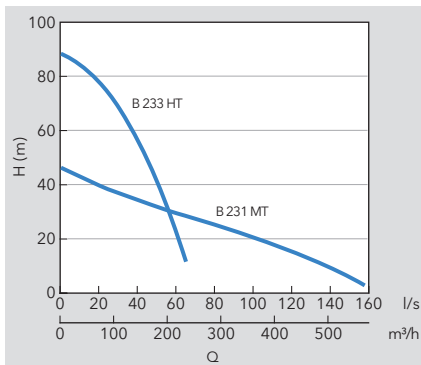

Model	B 231 MT	B 233 HT
Rating [kW]	37	37
Voltage [V/phase]	400, 3~	400, 3~
Rated current [A]	65	65
Weight [kg]	445	350
Max. height [mm]	1140	1050
Max. width [mm]	500	435
Discharge Ø [in]	8"	4"
Strainer hole [mm]	Ø 15	Ø 12
Warm liquid, 70°C	No	No


Available in Ex version 2201.590/691

For additional specifications, see product technical documentation. With reservation for changes.

Flygt submersible drainage pumps

2000 series

2250.011

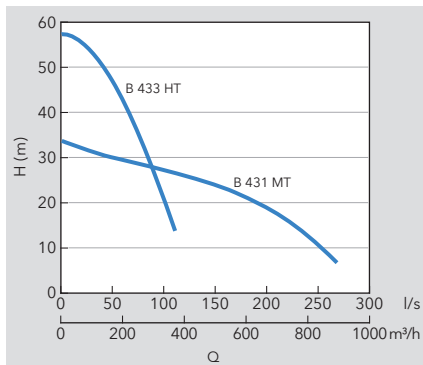


Model	B 431 MT	B 433 HT
Rating [kW]	54	54
Voltage [V/phase]	400, 3~	400, 3~
Rated current [A]	104	104
Weight [kg]	540	540
Max. height [mm]	1260	1260
Max. width [mm]	940	860
Discharge Ø [in]	10"	6"
Strainer hole [mm]	15×45	15×45
Warm liquid, 70°C	No	No

For additional specifications, see product technical documentation. With reservation for changes.

2000 series

2400.402

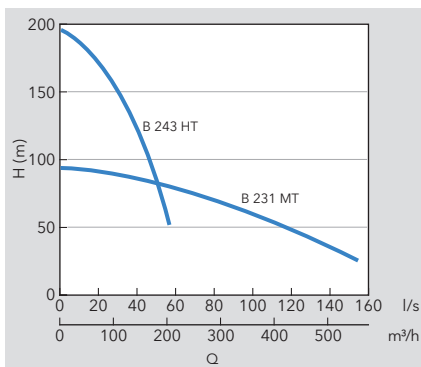

Model	B 231 MT	B 243 HT
Rating [kW]	90	90
Voltage [V/phase]	400, 3~	400, 3~
Rated current [A]	148	148
Weight [kg]	900	985
Max. height [mm]	1180	1145
Max. width [mm]	770	770
Discharge Ø [in]	6"	4"
Strainer hole [mm]	10×10	10×10
Warm liquid, 70°C	No	No

Available in Ex versions 2400.591

For additional specifications, see product technical documentation. With reservation for changes.

Flygt submersible drainage pumps



2000 series

2400.390 (Stainless steel)

HT



MT

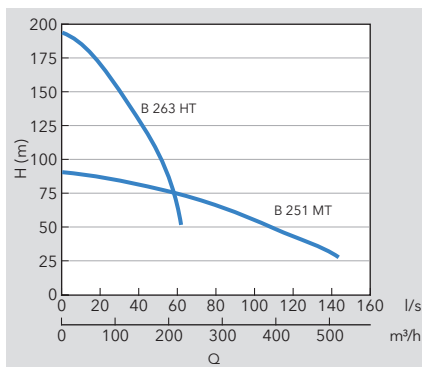

Model	B 251 MT	B 263 HT
Rating [kW]	85	85
Voltage [V/phase]	400, 3~	400, 3~
Rated current [A]	141 A	141 A
Weight [kg]	925	1015
Max. height [mm]	1180	1145
Max. width [mm]	740	700
Discharge Ø [in]	6"	4"
Strainer hole [mm]	10×10	10×10
Warm liquid, 70°C	No	No

For additional specifications, see product technical documentation. With reservation for changes.