

2600 series

**When water is your challenge,
Flygt 2600 is your answer.**


With a comprehensive range of pumps to suit any task, the Flygt 2600 series is the solution used to get the job done in mining, construction, industrial or municipal applications all over the world. The Flygt 2600 series have reliability built-in with innovative ways of reducing wear on the impeller and seal.





2600 series

2610.160/172

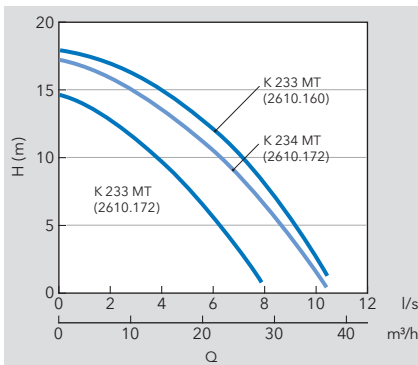


K = Open impeller.

Model	K 233 MT/K 234 MT (2610.172)	K 233 MT (2610.160)
Rating [kW]	0.85/1.2	1.4
Voltage [V/phase]	(110-140, 1~)/(220-550, 3~)	220-240, 1~
Rated current [A]	(11-5.1)/(4.8-2.0)	8-7.8
Weight [kg]	21.5	25
Max. height [mm]	571	601
Max. width [mm]	200	200
Discharge Ø [in]	2"	2"
Strainer hole [mm]	7.5	7.5
Warm liquid, 70°C	Yes	Yes

For additional specifications, see product technical documentation. With reservation for changes.

2600 series

2620.172

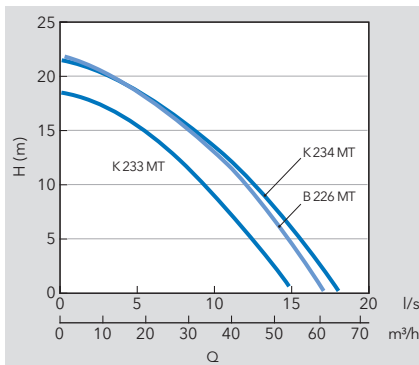

B = Wear-resistant impeller. K = Open impeller.


Model	K 233 MT	K 234 MT/B 226 MT
Rating [kW]	1.5	2.2
Voltage [V/phase]	220-240, 1~	220-550, 3~
Rated current [A]	8.7-8.3	8.1-3.9
Weight [kg]	32	32
Max. height [mm]	620	620
Max. width [mm]	240	240
Discharge Ø [in]	3"	3"
Strainer hole [mm]	9.0	9.0
Warm liquid, 70°C	Yes	Yes

For additional specifications, see product technical documentation. With reservation for changes.

Flygt submersible drainage pumps

2600 series

2630.181

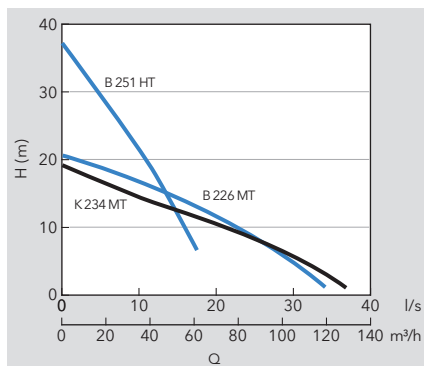


B = Wear-resistant impeller. K = Open impeller.

Model	B 226 MT	B 251 HT	K 234 MT
Rating [kW]	3.7	3.7	3.7
Voltage [V/phase]	400, 3~	400, 3~	400, 3~
Rated current [A]	7.3	7.3	7.3
Weight [kg]	48	48	48
Max. height [mm]	725	725	725
Max. width [mm]	286	286	286
Discharge Ø [in]	4"	3"	4"
Strainer hole [mm]	10	10	10
Warm liquid, 70°C	Yes	Yes	Yes

For additional specifications, see product technical documentation. With reservation for changes.

2600 series

2640.181

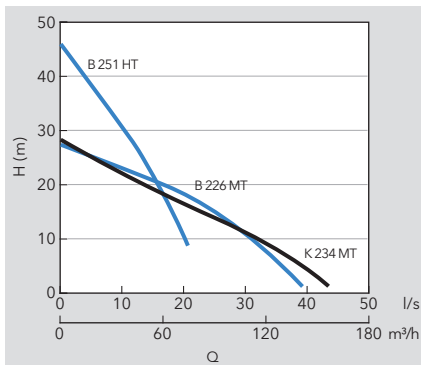

B = Wear-resistant impeller. K = Open impeller.


Model	B 226 MT	B 251 HT	K 234 MT
Rating [kW]	5.6	5.6	5.6
Voltage [V/phase]	400, 3~	400, 3~	400, 3~
Rated current [A]	11	11	11
Weight [kg]	50	50	50
Max. height [mm]	725	725	725
Max. width [mm]	286	286	286
Discharge Ø [in]	4"	3"	4"
Strainer hole [mm]	10	10	10
Warm liquid, 70°C	Yes	Yes	Yes

For additional specifications, see product technical documentation. With reservation for changes.

Flygt submersible drainage pumps

2600 series

2660.181

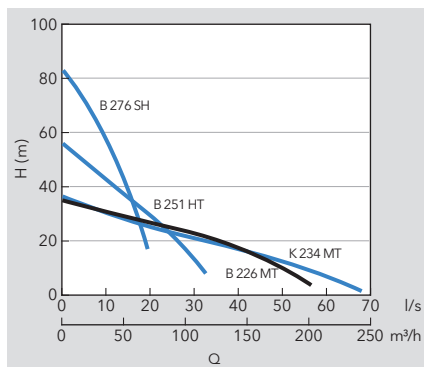

B = Wear-resistant impeller. K = Open impeller.


Model	B 226 MT	B 251 HT	B 276 SH	K 234 MT
Rating [kW]	10	10	10	10
Voltage [V/phase]	400, 3~	400, 3~	400, 3~	400, 3~
Rated current [A]	19	19	19	19
Weight [kg]	78	78	96	78
Max. height [mm]	803	803	890	803
Max. width [mm]	346	346	346	346
Discharge Ø [in]	6"	4"	4"	6"
Strainer hole [mm]	10	10	10	10
Warm liquid, 70°C	Yes	Yes	Yes	Yes

Available with Flygt Softstarter to reduce starting current. See page 61.

For additional specifications, see product technical documentation. With reservation for changes.

2600 series

2670.181

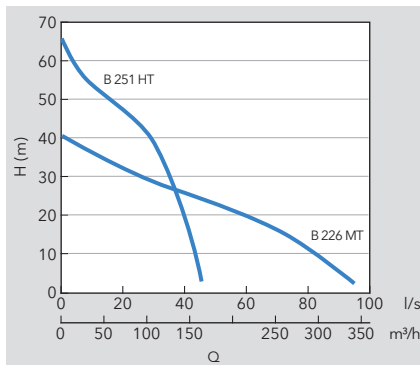

B = Wear-resistant impeller.

Model	B 226 MT	B 251 HT
Rating [kW]	18	18
Voltage [V/phase]	400, 3~	400, 3~
Rated current [A]	32	32
Weight [kg]	132	132
Max. height [mm]	955	955
Max. width [mm]	395	395
Discharge Ø [in]	6"	4"
Strainer hole [mm]	12	12
Warm liquid, 70°C	Yes	Yes

Available with Flygt Softstarter to reduce starting current. See page 61.


For additional specifications, see product technical documentation. With reservation for changes.

2600 sludge series

Built on the Flygt 2600 series platform, these portable sludge pumps tackle the tough challenge of moving sludge and other liquids with ease - without clogging.


These compact solids-handling pumps feature a high-chrome vortex impeller to enable the passage of large solids as well as solids concentrations of approximately 20% by weight.

This makes them ideal for dewatering in construction, mining, industrial and wastewater applications.

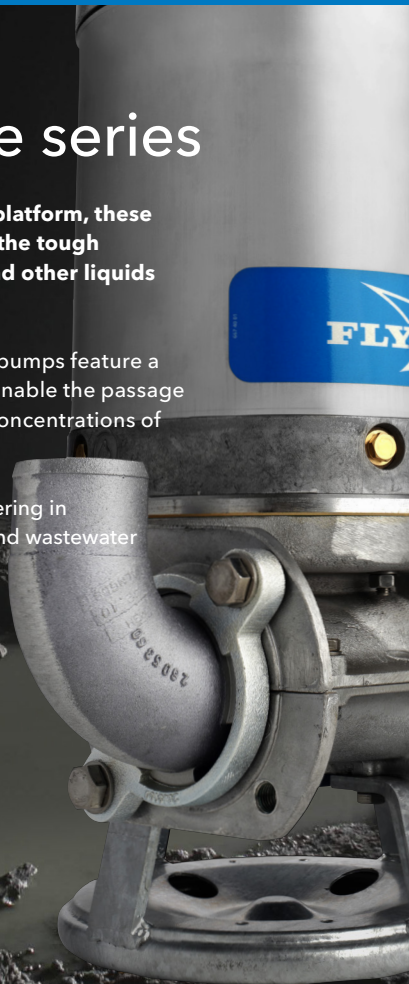

2600 sludge series

2620.281

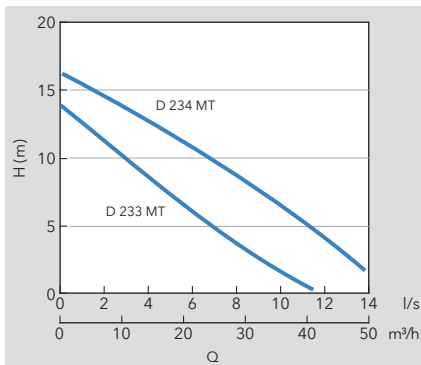

D = Solids-handling impeller.


Model	D 233 MT	D 234 MT
Rating [kW]	1.5	2.2
Voltage [V/phase]	220-240, 1~	220-525, 3~
Rated current [A]	8.7-8.3	8.1-3.7
Weight [kg]	33	33
Max. height [mm]	722	722
Max. width [mm]	410	410
Discharge Ø [in]	3"	3"
Solids passage ø [mm]	50	50
Warm liquid, 70°C	No	No

For additional specifications, see product technical documentation. With reservation for changes.

Flygt submersible drainage pumps

2600 sludge series

2630.281

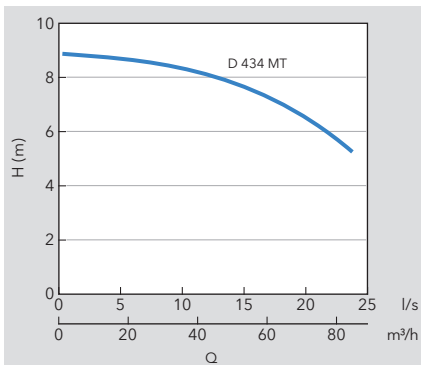


D = Solids-handling impeller.

Model	D 434 MT
Rating [kW]	3.2
Voltage [V/phase]	220-550, 3~
Rated current [A]	13-5.5
Weight [kg]	54
Max. height [mm]	815
Max. width [mm]	465
Discharge Ø [in]	3"
Solids passage ø [mm]	80
Warm liquid, 70°C	No

For additional specifications, see product technical documentation. With reservation for changes.

2600 sludge series

2640.281

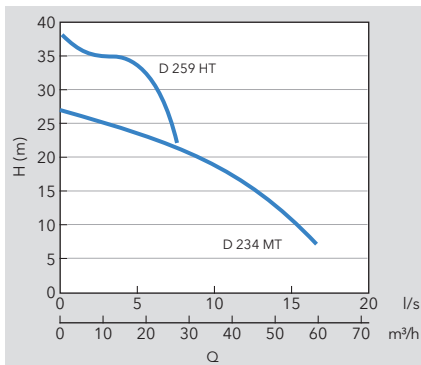

D = Solids-handling impeller.

Model	D 234 MT	D 259 HT
Rating [kW]	5.6	5.6
Voltage [V/phase]	220-1000, 3~	220-1000, 3~
Rated current [A]	19-4.3	19-4.3
Weight [kg]	56	56
Max. height [mm]	865	865
Max. width [mm]	452	452
Discharge Ø [in]	3"	3"
Solids passage ø [mm]	46	32
Warm liquid, 70°C	No	No

For additional specifications, see product technical documentation. With reservation for changes.