

NEW Products



SWIVEL LOOP HANGER 100

- Recommended for the suspension of stationary non-insulated pipe lines
- Features a retained insert nut to ensure that the loop hanger and insert nut stay together

See page 20



LOOP HANGER SURGE RESTRAINT LHSR6

- Grips the loop hanger – not the nut – allowing fine tuning for height adjustment
- Installs without tools
- Restricts the upward surge movement of activated fire sprinkler systems

See page 20



 <p>NEW</p>	 <p>NEW</p>		
<p>Page 20</p>	<p>Page 20</p>	<p>Page 21</p>	<p>Page 22</p>
<p>100</p>	<p>LHSR6</p>	<p>115</p>	<p>101</p>
			
<p>Page 23</p>	<p>Page 24</p>	<p>Page 25</p>	<p>Page 26</p>
<p>100FL</p>	<p>102</p>	<p>102A</p>	<p>103</p>
			
<p>Page 27</p>	<p>Page 27</p>	<p>Page 28</p>	<p>Page 29</p>
<p>104</p>	<p>VTR</p>	<p>418</p>	<p>418FL</p>




SWIVEL LOOP HANGER 100

Heavy Duty Adjustable Band Hanger

- Size Range: 1/2" through 8"
- Surface Finish: Electro-zinc plated
- Recommended for the suspension of stationary non-insulated pipe lines
- Features a retained insert nut to ensure that the loop hanger and insert nut stay together
- Conforms with Federal Specification WW-H-171 (Type 10), Manufacturers Standardization Society (MSS) SP-58 and SP-69 (Type 10)



Part Number	Nominal Pipe Size	RS	A	B	Max. Rec. Load (lbs)
1000050EG	1/2"	3/8"	2-3/4"	1"	300
1000075EG	3/4"	3/8"	3-1/16"	1"	300
1000100EG	1"	3/8"	3-5/16"	1"	300
1000125EG	1-1/4"	3/8"	3-9/16"	1"	300
1000150EG	1-1/2"	3/8"	3-13/16"	1"	300
1000200EG	2"	3/8"	4-1/4"	1"	300
1000250EG	2-1/2"	1/2"	5-5/8"	1-1/4"	1000
1000300EG	3"	1/2"	6-9/16"	1-1/4"	1000
1000350EG	3-1/2"	1/2"	7"	1-1/4"	1000
1000400EG	4"	5/8"	7-3/4"	1-5/16"	1100
1000500EG	5"	5/8"	9-1/8"	1-5/16"	1100
1000600EG	6"	3/4"	10-5/8"	1-9/16"	1250
1000800EG	8"	7/8"	13-1/8"	1-5/8"	1250

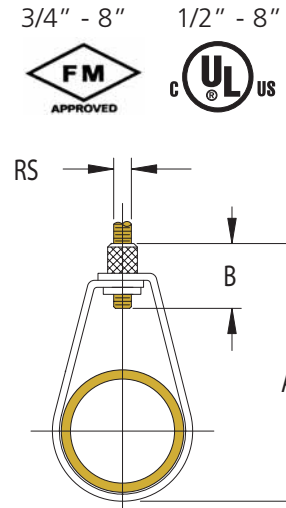

LOOP HANGER SURGE RESTRAINT LHSR6

Heavy Duty Adjustable Band Hanger

- Size Range: fits 1/2" through 2" model 100 loop hangers
- Surface Finish: CADDY® COAT Black
- Restricts the upward surge movement of activated fire sprinkler systems
- Meets NFPA® 13 requirements
- One size fits 1/2" thru 2" sizes of the model 100 loop hanger
- Grips the loop hanger – not the nut – allowing fine tuning for height adjustment
- Installs without tools




SWIVEL LOOP HANGER 115

Adjustable Band Hanger with NFPA Rod Sizes

- Size Range: 2-1/2" through 8"
- Surface Finish: Electro-zinc plated
- Recommended for the suspension of stationary non-insulated pipe lines
- Manufactured to use the minimum rod size permitted by NFPA for fire sprinkler piping
- Conforms with Federal Specification WW-H-171 (Type 10), Manufacturers Standardization Society (MSS) SP-58 and SP-69 (Type 10)



Part Number	Nominal Pipe Size	RS	A	B	Max. Rec. Load (lbs)
1150250EG	2-1/2"	3/8"	5-9/16"	1"	525
1150300EG	3"	3/8"	6-9/16"	1"	525
1150350EG	3-1/2"	3/8"	7-1/16"	1"	585
1150400EG	4"	3/8"	7-9/16"	1"	650
1150500EG	5"	1/2"	9-3/16"	1-1/4"	1000
1150600EG	6"	1/2"	11-5/16"	1-1/4"	1000
1150800EG	8"	1/2"	12-7/8"	1-1/4"	1000

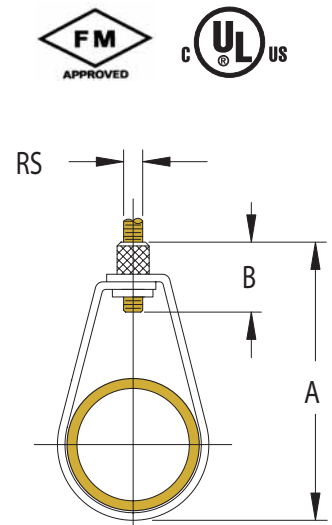


SWIVEL LOOP HANGER 101

Adjustable Band Hanger for Copper Tubing

- Size Range: 1/2" through 6"
- Surface Finish: Copper-colored coating (for identification purposes only)
- Recommended for the suspension of stationary non-insulated copper tubing lines
- Conforms with Federal Specification WW-H-171 (Type 10), Manufacturers Standardization Society (MSS) SP-58 and SP-69 (Type 10)



Part Number	Nominal Pipe Size	RS	A	B	Max. Rec. Load (lbs)
1010050CP	1/2"	3/8"	3-3/16"	1"	180
1010075CP	3/4"	3/8"	3-1/8"	1"	180
1010100CP	1"	3/8"	3-1/8"	1"	180
1010125CP	1-1/4"	3/8"	3-3/16"	1"	180
1010150CP	1-1/2"	3/8"	3-5/8"	1"	180
1010200CP	2"	3/8"	3-13/16"	1"	180
1010250CP	2-1/2"	3/8"	4-7/16"	1"	200
1010300CP	3"	1/2"	5-11/16"	1-1/4"	250
1010350CP	3-1/2"	1/2"	6-7/16"	1-1/4"	300
1010400CP	4"	1/2"	7-1/8"	1-1/4"	360
1010500CP	5"	5/8"	9-1/4"	1-5/16"	480
1010600CP	6"	3/4"	11-3/16"	1-9/16"	630

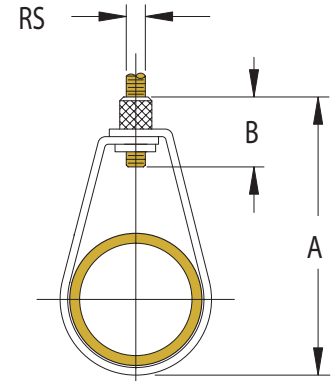

SWIVEL LOOP HANGER 100FL


Felt-lined Adjustable Band Hanger

- Size Range: 1/2" through 4"
- Surface Finish: Electro-zinc plated
- Recommended for the suspension of stationary non-insulated copper tubing lines to prevent electrolysis
- Felt lining also acts to reduce noise in pipes
- Conforms with Federal Specification WW-H-171 (Type 10), Manufacturers Standardization Society (MSS) SP-58 and SP-69 (Type 10)



Part Number	Nominal Pipe Size	RS	A	B	Max. Rec. Load (lbs)
1000050FL	1/2"	3/8"	2-3/4"	1"	300
1000075FL	3/4"	3/8"	3-1/16"	1"	300
1000100FL	1"	3/8"	3-5/16"	1"	300
1000125FL	1-1/4"	3/8"	3-9/16"	1"	300
1000150FL	1-1/2"	3/8"	3-13/16"	1"	300
1000200FL	2"	3/8"	4-1/4"	1"	300
1000250FL	2-1/2"	1/2"	5-5/8"	1-1/4"	1000
1000300FL	3"	1/2"	6-9/16"	1-1/4"	1000
1000350FL	3-1/2"	1/2"	7"	1-1/4"	1000
1000400FL	4"	5/8"	7-3/4"	1-5/16"	1100

3/4" - 8" 1/2" - 8"

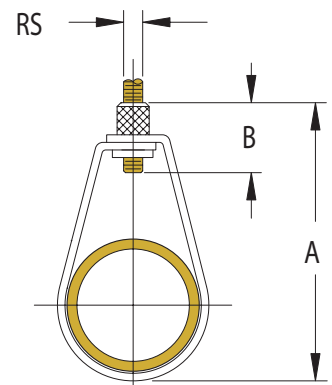


SWIVEL LOOP HANGER 102

PVC Coated Adjustable Band Hanger

- Size Range: 1/2" through 8"
- Surface Finish: Electro-zinc plated with a vinyl top coat
- Recommended for the suspension of stationary non-insulated pipe lines
- Conforms with Federal Specification WW-H-171 (Type 10), Manufacturers Standardization Society (MSS) SP-58 and SP-69 (Type 10)



Part Number	Nominal Pipe Size	RS	A	B	Max. Rec. Load (lbs)
1020050VC	1/2"	3/8"	3-1/8"	1"	300
1020075VC	3/4"	3/8"	3-1/16"	1"	300
1020100VC	1"	3/8"	3-3/16"	1"	300
1020125VC	1-1/4"	3/8"	3-1/2"	1"	300
1020150VC	1-1/2"	3/8"	3-15/16"	1"	300
1020200VC	2"	3/8"	4-1/2"	1"	300
1020250VC	2-1/2"	1/2"	5-5/8"	1-1/4"	1000
1020300VC	3"	1/2"	6-9/16"	1-1/4"	1000
1020350VC	3-1/2"	1/2"	7"	1-1/4"	1000
1020400VC	4"	5/8"	7-3/4"	1-5/16"	1100
1020500VC	5"	5/8"	9-1/8"	1-5/16"	1100
1020600VC	6"	3/4"	10-5/8"	1-9/16"	1250
1020800VC	8"	7/8"	13-1/8"	1-5/8"	1250

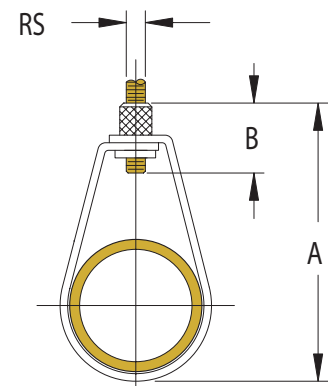


SWIVEL LOOP HANGER 102A

PVC Coated Adjustable Band Hanger for Copper Tubing

- Size Range: 1/2" through 6"
- Surface Finish: Copper colored coating with a vinyl top coat
- Recommended for the suspension of stationary non-insulated copper tubing lines where it is undesirable to have the steel of the hanger in direct contact with the copper tubing
- Conforms with Federal Specification WW-H-171 (Type 10), Manufacturers Standardization Society (MSS) SP-58 and SP-69 (Type 10)



Part Number	Nominal Pipe Size	RS	A	B	Max. Rec. Load (lbs)
102A0050VC	1/2 "	3/8 "	3-3/16"	1"	180
102A0075VC	3/4 "	3/8 "	3-1/8"	1"	180
102A0100VC	1 "	3/8 "	3-1/8"	1"	180
102A0125VC	1-1/4 "	3/8 "	3-3/16"	1"	180
102A0150VC	1-1/2 "	3/8 "	3-5/8"	1"	180
102A0200VC	2 "	3/8 "	3-13/16"	1"	180
102A0250VC	2-1/2 "	1/2 "	4-7/16"	1"	200
102A0300VC	3 "	1/2 "	5-11/16"	1-1/4"	250
102A0350VC	3-1/2 "	1/2 "	6-7/16"	1-1/4"	300
102A0400VC	4 "	1/2 "	7-1/8"	1-1/4"	360
102A0500VC	5 "	5/8 "	9-1/4"	1-5/16"	480
102A0600VC	6 "	3/4 "	11-3/16"	1-9/16"	630

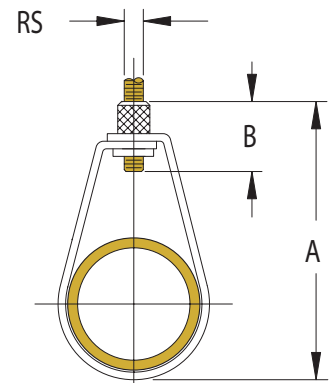


SWIVEL LOOP HANGER 103

Adjustable Band Hanger with Insulation Shield

- Size Range: 1-1/2" through 6"
- Surface Finish: Electro-zinc plated
- Recommended for the suspension of stationary low or high temperature piping where crush resistant material is installed at the point of support
- Protection shield is welded to loop before plating
- Flared edges on sizes through 4" only
- For sizes larger than 6" see Model 403 Clevis Hanger



Part Number	Nominal Pipe Size	RS	A	B	C	Max. Rec. Load (lbs)
1030150EG	1-1/2"	3/8"	3-13/16"	1"	3"	300
1030200EG	2"	3/8"	4-1/4"	1"	3"	300
1030250EG	2-1/2"	1/2"	5-5/8"	1-1/4"	4"	1000
1030300EG	3"	1/2"	6-9/16"	1-1/4"	4"	1000
1030350EG	3-1/2"	1/2"	7"	1-1/4"	4"	1000
1030400EG	4"	5/8"	7-3/4"	1-5/16"	6"	1100
1030500EG	5"	5/8"	9-1/8"	1-5/16"	6"	1100
1030600EG	6"	3/4"	10-5/8"	1-9/16"	6"	1250

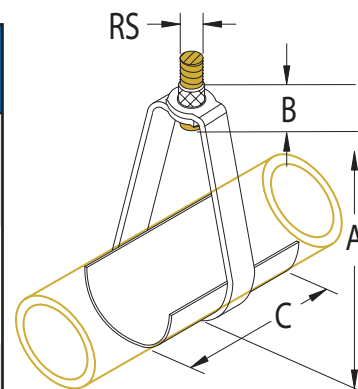

Flared edges on sizes thru 4" only.
Insulation not included.




SWIVEL LOOP HANGER 104

Adjustable Band Hanger for Plastic Pipe

- Size Range: 1/2" through 4"
- Surface Finish: Electro-zinc plated
- Recommended for the suspension of stationary flexible EPDM or Polypropylene plastic piping
- Use hanger with V-trough (model VTR) for continuous support of flexible or hot piping services




Part Number	Size No.	Nominal Pipe Size	RS	A	B	Max. Rec. Load (lbs)
1040100EG	1	1/2"	3/8"	5-7/8"	7/8"	175
1040100EG	1	3/4"	3/8"	5-7/8"	7/8"	175
1040100EG	1	1"	3/8"	5-7/8"	7/8"	175
1040100EG	1	1-1/4"	3/8"	5-7/8"	7/8"	175
1040100EG	1	1-1/2"	3/8"	5-7/8"	7/8"	175
1040100EG	1	2"	3/8"	5-7/8"	7/8"	175
1040200EG	2	2-1/2"	1/2"	9-1/4"	1-1/8"	175
1040200EG	2	3"	1/2"	9-1/4"	1-1/8"	175
1040200EG	2	3-1/2"	1/2"	9-1/4"	1-1/8"	175
1040200EG	2	4"	1/2"	9-1/4"	1-1/8"	175

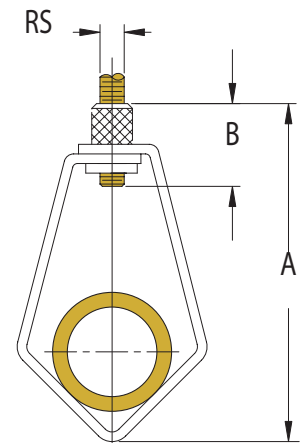


CONTINUOUS SUPPORT VTR

V-trough Support for Flexible or Hot Piping Services

- Surface Finish: Electro-zinc plated
- Used with the model 104 Hanger for continuous support of flexible or hot piping services

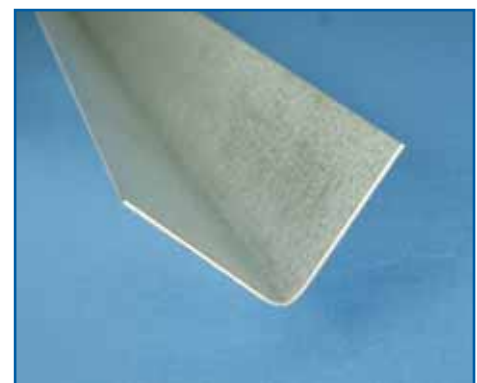

Part Number	Nominal Pipe Size	Size
VTR#11000	1/2" thru 2"	#1
VTR#21000	2-1/2" thru 4"	#2

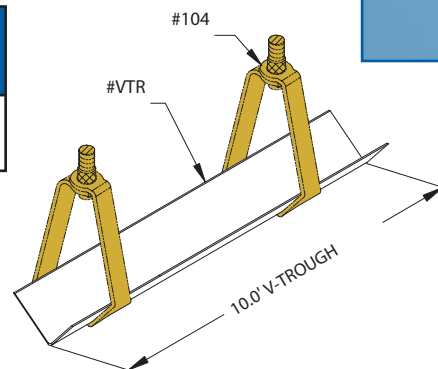


J-HANGER 418

Galvanized J-hanger

- Size Range: 1/2" through 8"
- Surface Finish: Electro-zinc plated
- Recommended for the suspension of stationary non-insulated pipe lines
- T-slot hole for bolt head permits disengagement of side bolt without removing the nut (sizes 1/2" thru 4" only)
- Side hole permits wall mounting (sizes 1/2" thru 4" only)
- Conforms Manufacturers Standardization Society (MSS) SP-58 and SP-69 (Type 5)



Part Number	Nominal Pipe Size	RS	A	B	Max. Rec. Load (lbs)
4180050EG	1/2"	3/8"	3"	9/16"	400
4180075EG	3/4"	3/8"	3-3/8"	9/16"	400
4180100EG	1"	3/8"	3-11/16"	9/16"	400
4180125EG	1-1/4"	3/8"	4-1/2"	9/16"	400
4180150EG	1-1/2"	3/8"	4-13/16"	9/16"	400
4180200EG	2"	3/8"	5-11/16"	9/16"	400
4180250EG	2-1/2"	1/2"	6-3/4"	11/16"	800
4180300EG	3"	1/2"	7-11/16"	11/16"	800
4180350EG	3-1/2"	1/2"	8-3/8"	11/16"	800
4180400EG	4"	5/8"	9-3/16"	13/16"	800
4180500EG	5"	5/8"	10"	13/16"	800
4180600EG	6"	3/4"	11-5/8"	15/16"	1000
4180800EG	8"	3/4"	14-1/16"	1-1/16"	1200

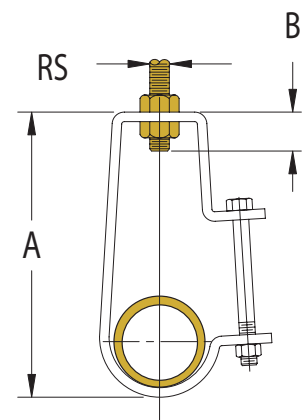

J-HANGER 418FL

Galvanized Felt-lined J-hanger

- Size Range: 1/2" through 4"
- Surface Finish: Electro-zinc plated
- Recommended for the suspension of stationary non-insulated pipe lines
- Felt lining also acts to reduce noise in pipes
- T-slot hole for bolt head permits disengagement of side bolt without removing the nut
- Side hole permits wall mounting
- Conforms Manufacturers Standardization Society (MSS) SP-58 and SP-69 (Type 5)



Part Number	Nominal Pipe Size	RS	A	B	Max. Rec. Load (lbs)
4180050FL	1/2"	3/8"	3"	9/16"	400
4180075FL	3/4"	3/8"	3-3/8"	9/16"	400
4180100FL	1"	3/8"	3-11/16"	9/16"	400
4180125FL	1-1/4"	3/8"	4-1/2"	9/16"	400
4180150FL	1-1/2"	3/8"	4-13/16"	9/16"	400
4180200FL	2"	3/8"	5-1/16"	9/16"	400
4180250FL	2-1/2"	1/2"	6-3/4"	11/16"	800
4180300FL	3"	1/2"	7-11/16"	11/16"	800
4180350FL	3-1/2"	1/2"	8-9/16"	11/16"	800
4180400FL	4"	5/8"	9-3/16"	13/16"	800

