

Flygt BIBO 2800

For decades whenever a dewatering challenge seemed too tough or too harsh, the answer has been simple, Flygt BIBO. So how do you improve upon a legend? Simple, we created a new one.


It still has the iconic look; a shape that means stability and robustness. We took our proven hydraulic design and merged it with features that once set the standard in dewatering pumping. For mining, quarrying, construction and tunneling, Flygt BIBO, still a choice you never regret.





Flygt submersible drainage pumps

BIBO 2800 series
2830.180

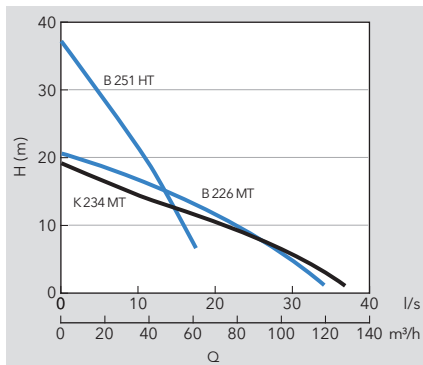


B = Wear-resistant impeller. K = Open impeller.

Model	B 226 MT	B 251 HT	K 234 MT
Rating [kW]	3.7	3.7	3.7
Voltage [V/phase]	400, 3~	400, 3~	400, 3~
Rated current [A]	7.3	7.3	7.3
Weight [kg]	54	54	54
Max. height [mm]	762	762	762
Max. width [mm]	367	367	367
Discharge Ø [in]	4"	3"	4"
Strainer hole [mm]	10	10	10
Warm liquid, 70°C	Yes	Yes	Yes

For additional specifications, see product technical documentation. With reservation for changes.

BIBO 2800 series

2840.180

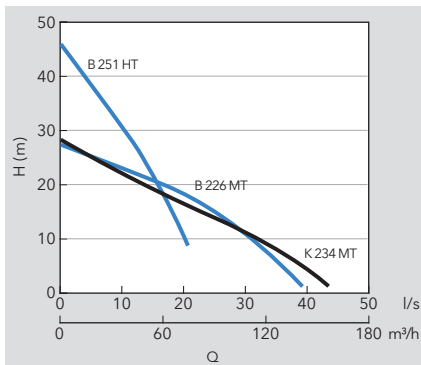


B = Wear-resistant impeller. K = Open impeller.

Model	B 226 MT	B 251 HT	K 234 MT
Rating [kW]	5.6	5.6	5.6
Voltage [V/phase]	400, 3~	400, 3~	400, 3~
Rated current [A]	11	11	11
Weight [kg]	56	56	56
Max. height [mm]	762	762	762
Max. width [mm]	367	367	367
Discharge Ø [in]	4"	3"	4"
Strainer hole [mm]	10	10	10
Warm liquid, 70°C	Yes	Yes	Yes

For additional specifications, see product technical documentation. With reservation for changes.

Flygt submersible drainage pumps

BIBO 2800 series 2860.180

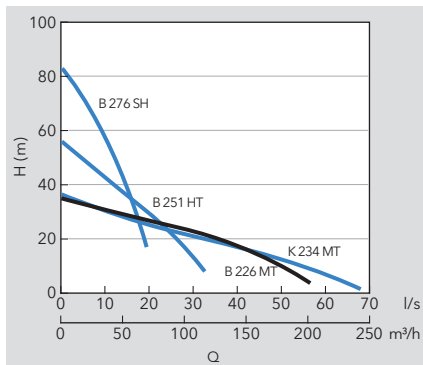


B = Wear-resistant impeller. K = Open impeller.

Model	B 226 MT	B 251 HT	B 276 SH	K 234 MT
Rating [kW]	10	10	10	10
Voltage [V/phase]	400, 3~	400, 3~	400, 3~	400, 3~
Rated current [A]	19	19	19	19
Weight [kg]	91	91	106	91
Max. height [mm]	889	889	925	889
Max. width [mm]	425	425	425	425
Discharge Ø [in]	6"	4"	4"	6"
Strainer hole [mm]	10	10	10	10
Warm liquid, 70°C	Yes	Yes	Yes	Yes

For additional specifications, see product technical documentation. With reservation for changes.

BIBO 2800 series

2870.180

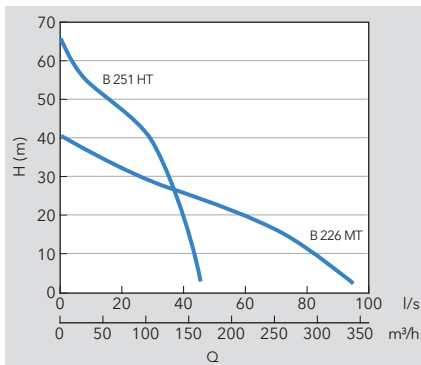

B = Wear-resistant impeller.

Model	B 226 MT	B 251 HT
Rating [kW]	18	18
Voltage [V/phase]	400, 3~	400, 3~
Rated current [A]	32	32
Weight [kg]	155	155
Max. height [mm]	991	991
Max. width [mm]	500	500
Discharge Ø [in]	6"	4"
Strainer hole [mm]	12	12
Warm liquid, 70°C	Yes	Yes

For additional specifications, see product technical documentation. With reservation for changes.