


# CM32

## DIESEL ENGINE GENERATOR SET

5590-7450 kW<sub>e</sub>

750 rpm

60 Hz

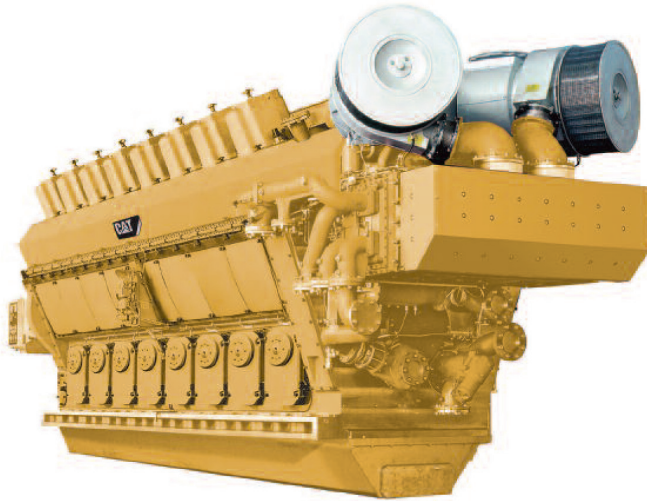

### FEATURES

#### Designed for Reliable Operation

- Intensive cooling of key components including exhaust valve seats, injector cooling integrated into lube oil system and high-efficiency turbocharger
- Capable of operation up to 700 cSt/50°C fuel quality according to CIMAC H55/K55

#### Minimized Mechanical Wear

- Modular design
- State-of-the-art materials ensure long life of components

#### Overall Economy

- High availability and long life
- Low fuel and oil consumption
- Low maintenance requirements

#### Highest Quality Engine Parts

- Semi-dry wear resistant liners with calibration inserts
- Pistons with forged steel crown and aluminum skirt
- Inlet/outlet valves with armored seats
- High-efficiency turbocharger

#### One-Piece Dry Engine Block

- High-strength nodular cast iron with underslung crankshaft, free from cooling water

#### Ease of Maintenance and Reliability

- Easily removable cylinder heads, quick removable fluid connections
- Split connecting rods to allow piston removal without disturbing the big end bearing
- High reliability, modular design and integral construction reduce the number of components by 40% over conventional design

### ENGINE

- Engine type: 4-stroke cycle diesel engine
- Cylinder configuration: Vee – 12, 16
- Fuel type: LFO, CRO and HFO up to 700 cSt
- Bore: 320 mm (12.6 in)
- Stroke: 420 mm (16.5 in)
- Cylinder displacement: 33.8 L (2063 in<sup>3</sup>)
- Cylinder output: 480 kW (644 bhp)
- Mean piston speed: 10.1 m/s (33.1 ft/s)
- Mean effective pressure: 23.7 bar (344 psig)
- Aspiration: Turbocharged and aftercooled
- Compression ratio: 14.2:1
- Engine rating: 5760-7680 kW
- Generator set rating: 5590-7450 kW<sub>e</sub>

#### Total Power Solutions

- Caterpillar can develop, finance, design, build, test, maintain and operate medium speed reciprocating engine power plants and plant assets; and at the customer's option provide:
  - Power generation equipment
  - Engineered systems
  - Combined heat and power systems
  - Construction and installation services
  - Operation and maintenance services
  - Turnkey power plants
  - Contract power

#### Worldwide Product Support

- With nearly 200 Cat<sup>®</sup> dealers and 1,500 facilities worldwide serving in excess of 200 countries, you're never far from the Cat support you need
- Customer Support Agreements offer back-to-back services including scheduled inspections, preventive maintenance and overhauls to full operations and maintenance

# CM32

## DIESEL ENGINE GENERATOR SET

### NOMINAL PERFORMANCE

	ENGINE RATING		GENERATOR SET RATING		SPEED	FREQUENCY	HEAT RATE		SPECIFIC LUBE OIL CONSUMPTION	
	kWm	kWe	kVA				kJ/kWh	Btu/kWh	g/kWh	lb/kWh
12CM32C	5760	5590	6,988		750	60	7748	7,343	0.6	0.0013
16CM32C	7680	7450	9,312		720	60	7748	7,343	0.6	0.0013

### RATING DEFINITIONS AND CONDITIONS

Fuel type: Light fuel oil (LFO), crude oil (CRO) and heavy fuel oil (HFO) with fuel quality limit at 50°C according to CIMAC H55/K55.

Ratings: Based on ISO3046/1 standard reference conditions.

Power output: May require adjustment for values other than ISO3046/1 standard reference conditions.



Continuous output: Available for an unlimited time without varying load.

Generator efficiency: Efficiency of 97.0% based on 0.8 pf with medium voltage class generator; actual efficiency will depend on generator selection.

Fuel consumption: Based on ISO3046/1 standard reference conditions of 25°C (77°F) and 100 kPa (29.61 in Hg), excluding engine-driven pumps, with 5% tolerance and LCV = 42,700 kJ/kg (18,358 Btu/lb). Value based on measurement at the generator terminals.

Lube oil consumption: Tolerance on value of +/-0.3 g/kWh (0.0007-lb/kWh). Lube oil consumption can only be demonstrated after 500 hours of operation.

### GENERATOR SET DIMENSIONS

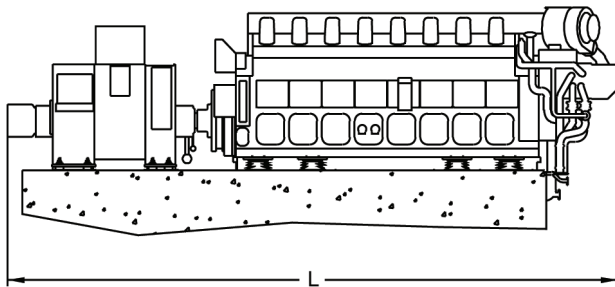

FOR MORE INFORMATION  
 Email: [cat\\_power@cat.com](mailto:cat_power@cat.com)  
 Website: <http://catoilandgasinfo.com>

	GENERATOR SET DIMENSIONS						APPOXIMATE WEIGHT (DRY)			
	Height (H)		Width (W)		Length (L)		Engine		Generator	
	mm	in	mm	in	mm	in	kg	lb	kg	lb
12CM32C	3329	131	3394	134	11 193	441	64 400	141,978	24 800	54,675
16CM32C	3329	131	3394	134	12 646	498	81 400	179,456	38 500	84,878

Materials and specifications are subject to change without notice. CAT, CATERPILLAR, their respective logos, "Caterpillar Yellow" and the "Power Edge" trade dress, as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission.

LEHW0145-00  
 ©2012 Caterpillar  
 All rights reserved.

