


MULTIFUNCTIONAL TANKS WITH REPLACEABLE MEMBRANE

Working temperature	-10°C +100°C	External finish color	RAL 9010	Rubber membrane	BUTILE PLUS
---------------------	-----------------	-----------------------	----------	-----------------	--------------------



TECHNICAL DRAWING

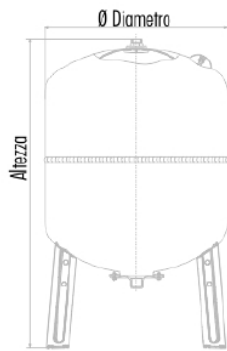

VIEW

All our vessels are manufactured, tested and checked according to current European regulations

MODEL	HEIGHT (mm)	DIAMETER (mm)	MAXIMUM WORKING PRESSURE (bar)	STANDARD PRECHARGE PRESSURE (bar)	CONNECTION (Inches)
MV+ 50	720	365	10	2.5	1"
MV+ 80	856	415	10	2.5	1"
MV+ 100	855	495	10	2.5	1"
MV+ 150	975	550	10	2.5	1"
MV+ 200	1085	600	10	2.5	1 ¼"
MV+ 300	1240	650	10	2.5	1 ¼"
MV+ 500	1490	750	10	2.5	1 ¼"