


Geberit HDPE Sovent fitting



Example image

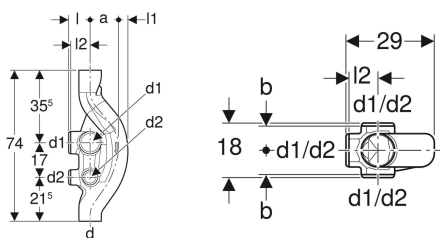

Application purposes

- For building drainage
- For buildings with more than five floors (high-rise buildings)

Characteristics

- Six connection options, closed

- UV-resistant
- With SuperTube technology

Technical data

Maximum discharge rate	12 l/s
Product material	PE-HD

Art. no.	DN	d, ø	d1, ø	d2, ø	a	l	l1	l2	b
367.614.16.1	100 / 100 / 70	110 mm	110 mm	75 mm	13 cm	10.5 cm	5.5 cm	9.5 cm	8 cm