
Floppy NO.

C A D

JS03.002.08-00

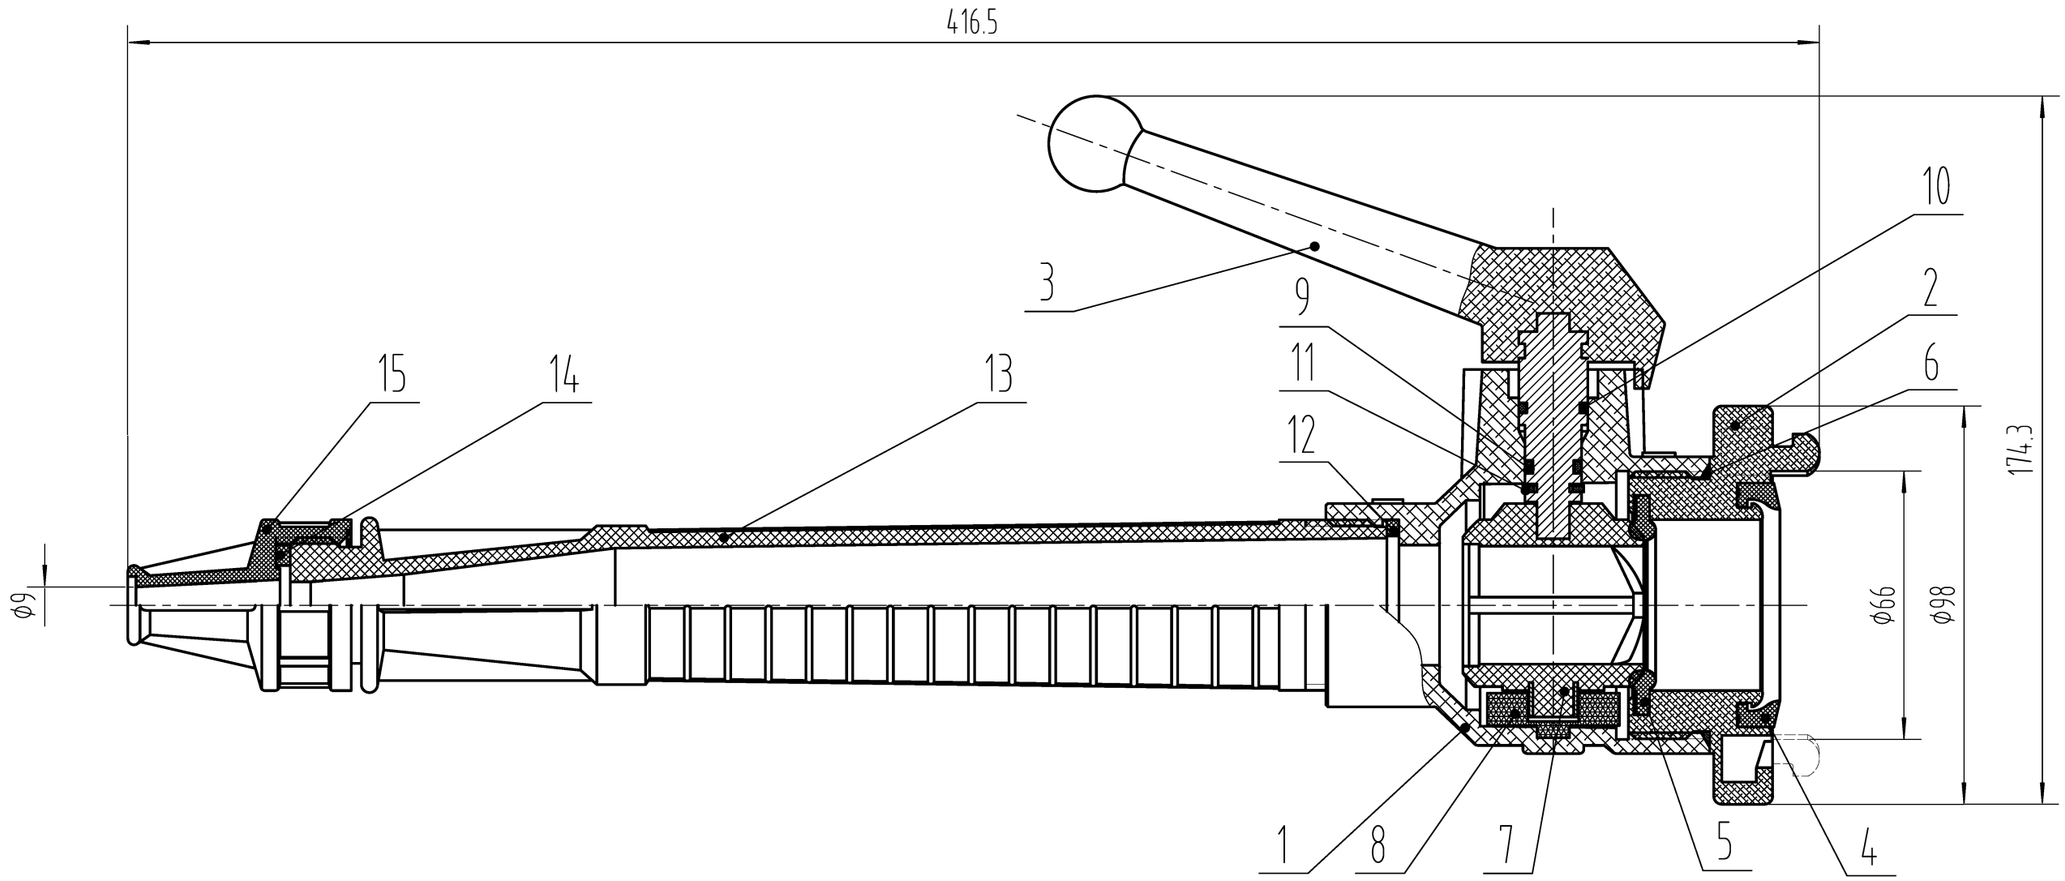

Sq.	Drawing No.	Name	Q'ty	Material	Weight	Remark
15	JS03.002.08-08	Plastic Nozzle	1	PA6		
14	JS03.002.23-22	Gasket	1	NBR		φ29.5Xφ19.5X3.5
13	JS03.002.08-07	Plastic pipes	1	PA6		Red
12	JS03.002.08-06	Gasket	1	NBR		φ42Xφ34X3
11	JS03.002.01-08	Plastic Retaining Ring	1	PA6		
10	JS02.002.46-07	O-Ring	1	NBR		φ12Xφ2.5
9	JS03.002.01-06	O-Ring	1	NBR		φ9Xφ2.6
8	JS03.002.27-01-05	Plastic Washer	2	PA6		Black
7	JS03.002.08-05	Plastic Ball	1	PA6		Black
6	JS02.002.05-09	O-Ring	1	NBR		φ62Xφ3
5	JS03.002.08-04	Gasket	1	PU		φ54Xφ32X6.5
4	JS05.00110-02	Gasket	1	NBR		φ60Xφ47X10.5
3	JS03.002.08-03	Lever	1	YZAlSi12		Vibration Polishing Treatment
2	JS03.002.08-02	Adapter	1	ZAlSi12		Vibration Polishing Treatment
1	JS03.002.08-01	Body	1	YZAlSi12		Vibration Polishing Treatment

Technical Requirements:

1, The Maximum Working Pressure Of The Hand-Held Branchpipes Is ≥7Bar;

2. Test Pressure:

No Leakage Of Air At 8Bar;

No Leakage Of Water At 18Bar。

Tracing

Proofread

The Old Original Figure Registration No.

Original Figure Registration NO.

Mark	Places	Modification No. Of The File	Signature	Date
Drawn By		2013.08.29 Standard		
Verified By		2013.09.02		
Technics			Approved By	2013.09.03

Assembly draws for Hand-Held Branchpipes

Material

Version No. A/0

JS03.002.08-00	Q'Ty	
Phase Mark	Weight	Scale
S A B C	935g	1:1.5
Total Page	Page No.	